

FRAMING SOLUTIONS

FOR POCKET DOORS



THE QUICK FIT POCKET
DOOR SYSTEM FROM



SCRIGNO®

QUICK FIT POCKET DOOR SYSTEMS

Scrigno is the market leader in the production and sale of frames for concealed sliding doors. Their pre-assembled cassette complete with timber components reduces installation time and simplifies the installation process.

WHY USE POCKET DOORS

Pocket doors are designed to remove the unusable space within buildings. By removing the footprint created by traditional hinged doors, users can make the most of their space.

With a typical space saving of 2.6m² per door compared to hinged doors, pocket doors are fast becoming the ideal solution where space is at a premium.

Pocket Door Systems are ideal for: Living areas, en-suites, office spaces and cloakrooms.

THE CASSETTE SYSTEM

Cassette / Pocket - Made from 0.5mm galvanised steel on the sides and 0.8mm on the top and bottom profile sections.

The cassette sides are formed using a single piece of pressed steel and the corrugations spaced from 10mm apart give the cassette excellent rigidity.

Horizontal Profile Sections - Further reinforce the structure and allow plasterboard to be fixed directly to the cassette.

Space Bars - Provided to be used during installation. These slot into the wooden jamb and cassette to ensure they are kept in alignment.

EASY 5 STEP INSTALLATION

1. Insert aluminium track
2. Attach jamb and space bars
3. Fix to studwork
4. Apply plasterboard and plaster
5. Insert door







SINGLE DOOR

INFORMATION

- Time Saving Pre-assembled Pocket
- Space Saving
- Simple Installation
- Suits Doors 35-44mm Thick
- Max Weight 100kg
- Endpost, crosspieces, cassette edge covers, door brushes and seals supplied as standard

CODE	IMPERIAL SINGLE DOOR SIZE				INSTALLATION SIZE INFORMATION						
	IMPERIAL		METRIC		CLEAR OPENING SIZE (WALKTHROUGH AREA)		CASSETTE	STRUCTURAL OPENING SIZE		FINISHED WALL/INTERNAL SPACE	
	WIDTH (LP)	HEIGHT (HP)	WIDTH (LP)	HEIGHT (HP)	WIDTH (W)	HEIGHT (H)	(C)	WIDTH (IL)	HEIGHT (IH)	(FW)	(IS)
SC10003	2ft 3" (27")	6ft 6" (78")	686mm	1981mm	656mm	1970mm	700	1466mm	2080mm	125mm	70mm
SC10004	2ft 6" (30")		762mm		732mm		750	1592mm		125mm	70mm
SC10005	2ft 9" (33")		838mm		808mm		900	1818mm		125mm	70mm
SC10006	3ft (36")		914mm		884mm		900	1894mm		125mm	70mm

CODE	METRIC SINGLE DOOR SIZE		INSTALLATION SIZE INFORMATION						
	METRIC		CLEAR OPENING SIZE (WALKTHROUGH AREA)		CASSETTE	STRUCTURAL OPENING SIZE		FINISHED WALL/INTERNAL SPACE	
	WIDTH (LP)	HEIGHT (HP)	WIDTH (W)	HEIGHT (H)	(C)	WIDTH (IL)	HEIGHT (IH)	(FW)	(IS)
SC14003	626mm	2040mm	600mm	2030mm	600	1310mm	2140mm	125mm	70mm
SC14004	726mm		700mm		700	1510mm		125mm	70mm
SC14005	826mm		800mm		800	1710mm		125mm	70mm
SC14006	926mm		900mm		900	1910mm		125mm	70mm


DIMENSION DIAGRAM



ACCESSORIES AND FEATURES



Slow - Damper Unit*
Max Door Weight 35kg
Product Code **SC90000**



Dynamic Auto Closer**
Max Door Weight 40kg
Product Code **SC90100**



Jamb Kit Single Door
White melamine **SC16200**
Unfinished **SC16000**
For single systems only

* One required per door
** May reduce walkthrough area by 50mm



SINGLE FIRE DOOR INFORMATION

- FD 30 Fire Rated System
- Time Saving Pre-assembled Pocket
- Space Saving
- Simple Installation
- Suits Fire Doors 35-44mm Thick
- Max Weight 120kg
- Architrave free edgeless system

CODE	IMPERIAL SINGLE DOOR SIZE				INSTALLATION SIZE INFORMATION						
	IMPERIAL		METRIC		CLEAR OPENING SIZE (WALKTHROUGH AREA)		CASSETTE	STRUCTURAL OPENING SIZE		FINISHED WALL/INTERNAL SPACE	
	WIDTH (LP)	HEIGHT (HP)	WIDTH (LP)	HEIGHT (HP)	WIDTH (W)	HEIGHT (H)	(C)	WIDTH (IL)	HEIGHT (IH)	(FW)	(IS)
SC50003	2ft 3" (27")	6ft 6" (78")	686mm	1981mm	656mm	1970mm	700	1490mm	2080mm	125mm	69mm
SC50004	2ft 6" (30")		762mm		732mm		750	1616mm		125mm	69mm
SC50005	2ft 9" (33")		838mm		808mm		900	1792mm		125mm	69mm
SC50006	3ft (36")		914mm		884mm		900	1918mm		125mm	69mm

CODE	METRIC SINGLE DOOR SIZE			INSTALLATION SIZE INFORMATION						
	METRIC		HEIGHT (HP)	CLEAR OPENING SIZE (WALKTHROUGH AREA)		CASSETTE	STRUCTURAL OPENING SIZE		FINISHED WALL/INTERNAL SPACE	
	WIDTH (LP)	HEIGHT (HP)		WIDTH (W)	HEIGHT (H)	(C)	WIDTH (IL)	HEIGHT (IH)	(FW)	(IS)
SC50014	726mm	2040mm	696mm	2030mm	700	1530mm	2140mm	125mm	69mm	
SC50015	826mm		796mm		800	1730mm		125mm	69mm	
SC50016	926mm		896mm		900	1930mm		125mm	69mm	
SC50017	1026mm		996mm		1000	2130mm		125mm	69mm	

DIMENSION DIAGRAM



ACCESSORIES AND FEATURES



Slow - Damper Unit*
Max Door Weight 35kg
Product Code SC90210



Automatic Self Closing Kit for FD30**
Product Code SC90200



**BS 476-22: 1987
30 Minute Fire Test**

When fitted with a FD30 Fire Door

* One required per door
** Required to Adhere to UK fire door regulations





DOUBLE DOOR


INFORMATION

- Time Saving Pre-assembled Pocket
- Space Saving
- Simple Installation
- Suits Doors 35-44mm Thick
- Max Weight 100kg
- Endpost, crosspieces, cassette edge covers, door brushes and seals supplied as standard

CODE	IMPERIAL DOUBLE DOOR SIZE				INSTALLATION SIZE INFORMATION						
	IMPERIAL		METRIC		CLEAR OPENING SIZE (WALKTHROUGH AREA)		CASSETTE	STRUCTURAL OPENING SIZE		FINISHED WALL/INTERNAL SPACE	
	WIDTH (LP)	HEIGHT (HP)	WIDTH (LP)	HEIGHT (HP)	WIDTH (W)	HEIGHT (H)	(C)	WIDTH (IL)	HEIGHT (IH)	(FW)	(IS)
SC11003	2ft 3" (27")	6ft 6" (78")	686mm	1981mm	1312mm	1970mm	700	2832mm	2080mm	125mm	70mm
SC11004	2ft 6" (30")		762mm		750		3084mm	125mm		70mm	
SC11005	2ft 9" (33")		838mm		900		3536mm	125mm		70mm	
SC11006	3ft (36")		914mm		900		3688mm	125mm		70mm	

CODE	METRIC DOUBLE DOOR SIZE		INSTALLATION SIZE INFORMATION						
	METRIC		CLEAR OPENING SIZE (WALKTHROUGH AREA)		CASSETTE	STRUCTURAL OPENING SIZE		FINISHED WALL/INTERNAL SPACE	
	WIDTH (LP)	HEIGHT (HP)	WIDTH (W)	HEIGHT (H)	(C)	WIDTH (IL)	HEIGHT (IH)	(FW)	(IS)
SC15003	626mm	2040mm	1200mm	2030mm	600	2520mm	2140mm	125mm	70mm
SC15004	726mm		1400mm		700	2920mm		125mm	70mm
SC15005	826mm		1600mm		800	3320mm		125mm	70mm
SC15006	926mm		1800mm		900	3720mm		125mm	70mm


DIMENSION DIAGRAM

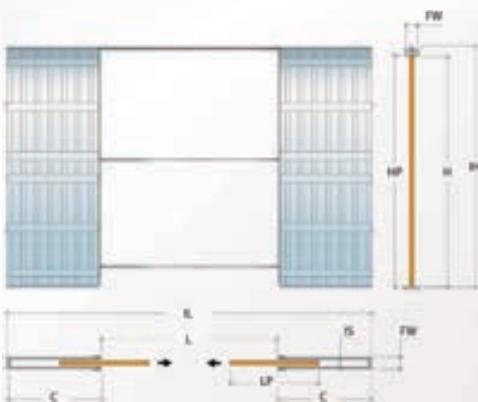

ACCESSORIES AND FEATURES



Slow - Damper Unit*
Max Door Weight 35kg
Product Code SC90000



Dynamic Auto Closer**
Max Door Weight 40kg
Product Code SC90100

- * One required per door
** May reduce walkthrough area by 50mm



Double Simultaneous Opening & Closing System
Max Door Weight 35kg

Door Sizes Imperial/Metric
SC91003 (to suit SC11003)
SC91004 (to suit SC11004)
SC91005 (to suit SC11005)
SC91006 (to suit SC11006)
SC95003 (to suit SC15003)
SC95004 (to suit SC15004)
SC95005 (to suit SC15005)
SC95006 (to suit SC15006)



Jamb Kit Double Door
White melamine **SC16210**
Unfinished **SC16010**
For double systems only



GLASS DOOR CONVERSION KIT

- Available for Single and Double Systems
- Works with the Scrigno Stech Range
- Suitable for glass doors 8mm - 10mm thick
- Max Door Weight 120kg
- Can be Retro-Fitted
- Additional Jamb kit supplied - Finished (White Melamine)

This kit enables new or existing Scrigno Pocket Doors to be converted into a glass pocket door system. Glass is increasing in popularity due to its modern look and the ability to allow more light to travel between space in your building or home.

Scrigno manufacture the pocket door system, glass is purchased separately through approved or recommended distributors.

The unique Scrigno conversion kit is adjustable from 8-10mm glass thickness. The high quality clamps hold the glass in place without having to drill through, making the glass doors more cost effective and installation faster.

ACCESSORIES AND FEATURES



Glass Conversion Kit
Product Code **SC40000**




Jamb Kit
White melamine **SC40001**
For glass systems only



3M Adhesive Designer Levers
Tube - **SC40010**
Quadra - **SC40011**
Ghost - **SC40012**
Model - **SC40013**



Accessories:
Slow Glass Damper Kit
Product Code **SC40009**

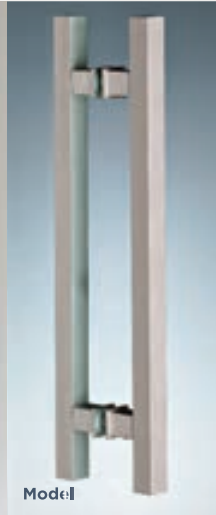

**boss
door
controls**

Exclusive UK distributors:

BOSS Door Controls Limited
3 & 4 Rutherford Square, Brucefield Industry Park,
LIVINGSTON, West Lothian, EH54 9BU
T: 01506 467477 **F:** 01506 467478
W: www.bosssdoorcontrols.com